

BOGE AIR. THE AIR TO WORK.



SCREW COMPRESSORS

OIL-FREE



Over 100,000 compressed air users expect more when it comes to their compressed air supply.

BOGE air provides them with the air to work.


BOGE oil-free screw compressors have long since proved their importance to compressed air users in critical applications such as pharmaceutical, food and semiconductor industries where absolutely oil-free compressed air is prerequisite.

With a BOGE oil-free screw there is no chance that oil can penetrate the compression process that means oil free air from the start. Oil-free air means less expensive downstream air treatment and moreover these compressors have been engineered for the safe and reliable generation of large quantities of oil-free air, energy efficiently, in base load or intermittent mode.

CONTENTS

| | |
|-----------------------------------|-----------|
| OIL-FREE SCREW COMPRESSORS | 4 |
| SO SERIES | 6 |
| COMPRESSED AIR DRYERS | 12 |
| BOGE SERVICE | 14 |

Clean and efficient compressed air: With BOGE screw compressors.

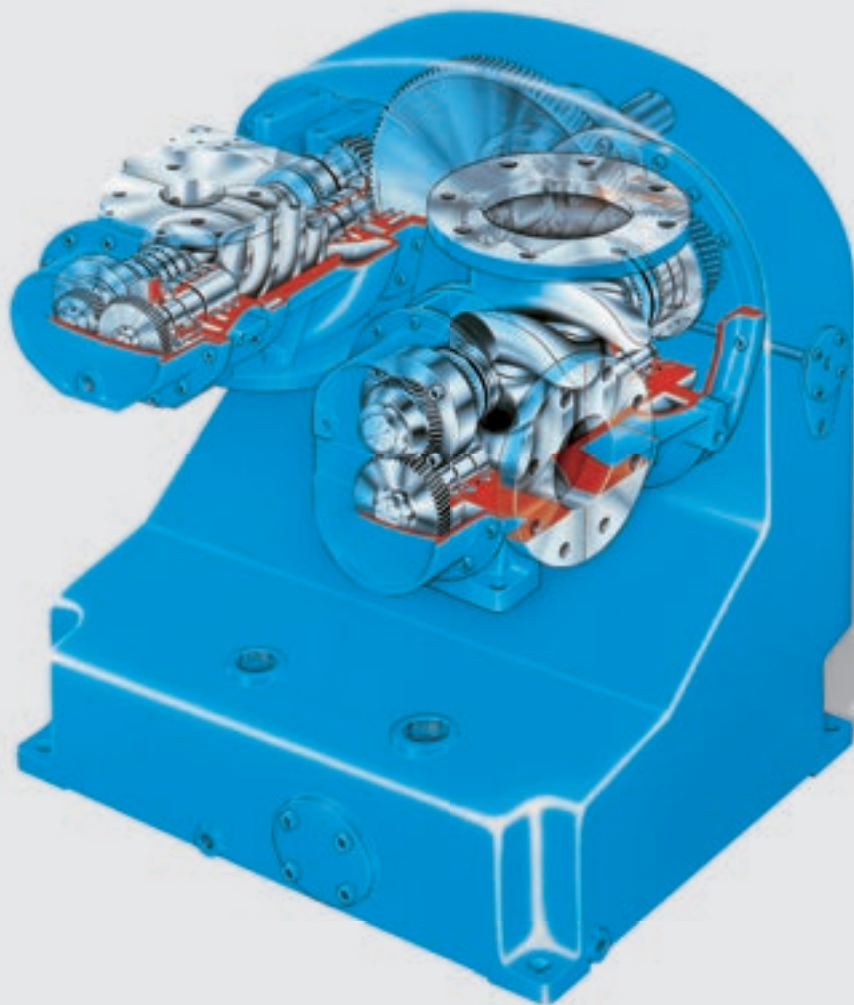

SOPHISTICATED TECHNOLOGY

Using a two-stage airend ensures very low specific power consumption. There are direct drive or belt drive options with frequency control as an option on all machines.

The shafts are sealed by a combination of special sealing rings and a two-stage labyrinth

vented to atmosphere. This system ensures optimum operational reliability. The precision rotors are finished with a durable coating that prevents corrosion.


The amply dimensioned airend roller bearings are of the highest quality and very durable giving

the most reliable service life even in the most demanding operational conditions.

These special bearings eliminate the need for other more traditional means of axial thrust compensation.

Clean air from the start: BOGE oil-free screws operate at much higher speeds than oil-injected counterparts and the heat of compression is therefore dissipated differently. The special BOGE airend and the cooling concept are the centrepiece of the design. Both components have been designed to provide utmost safety and maximum efficiency – ideally suited for sensitive fields of application.

SOPHISTICATED CONCEPT

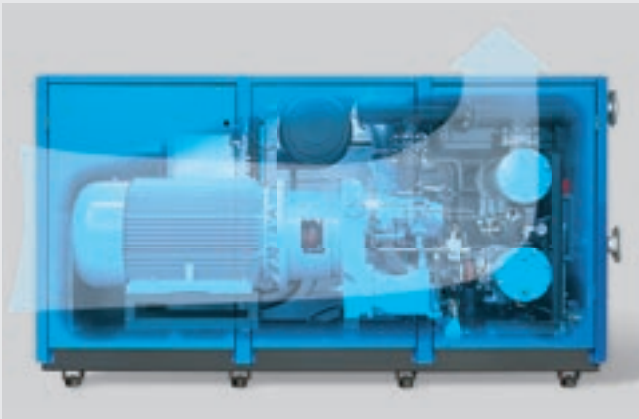

EFFICIENT COOLING AIR CIRCULATION

BOGE oil-free screw compressors are divided into three clearly defined sections. The component parts are intelligently positioned along the cooling air flow – for increased service life and prompt availability of compressed air. Control electronics, electrical components and motor are located in the coolest part of the machine.

Both airend stages are easily accessible. Because a separate cooling air fan is fitted as standard an optional cowl cooler can be mounted directly on the compressor. As the discharge air is cooled, no additional discharge ducting is required which means the compressor can be installed according to individual requirements


RELIABLE COOLING CONCEPT

BOGE oil-free screws are available air or water-cooled. A tube in shell principal is used for water cooling. Water flows through the pipes and the compressed air around them, which means that the “dirty” medium passes through the pipes – this facilitates easy maintenance and cleaning. The use of ribbed pipes on the compressed air side and plain pipes on the water-side ensure a high degree of efficiency. Flanged pipes also ensure the replacement of the cooling module without having to remove a single component whereas easily extractable pipe bundles make cleaning in mounted condition simpler than ever. The coolant can be treated to achieve the necessary water quality if required. Where no cooling water is available BOGE can supply a chilling system. Air cooling is possible in many applications which means that a cooling water supply and the associated costs can be totally eliminated.

The safe way to generate oil-free compressed air:

Design advantages of the SO series.

INTELLIGENT DESIGN

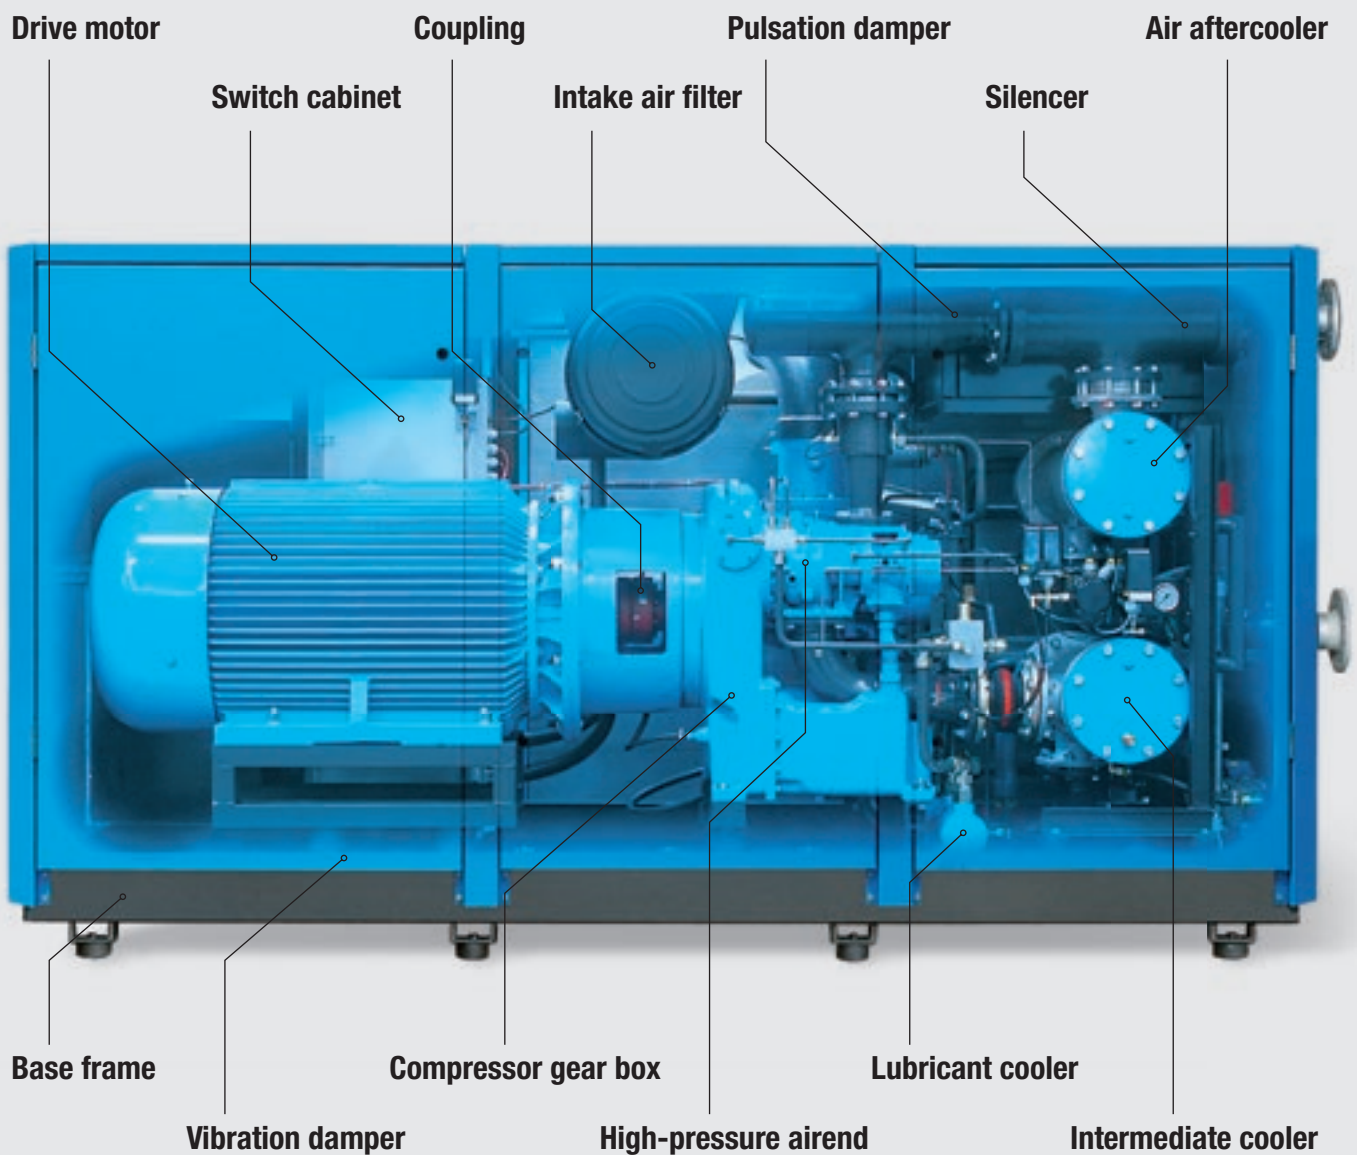

(Example shows water cooled system)

Precise engineering for clean results: The SO series is characterised by its intelligent design, innovative functional principle and high quality workmanship. Its dependable quality and high efficiency ensure safe and cost effective generation of oil-free compressed air. Air or water-cooled, fixed or variable speed options are available to suit most every site condition.

CONVINCING ADVANTAGES



HIGH QUALITY AND MAINTENANCE FRIENDLY DESIGN

Ease of maintenance was one of the crucial design factors when developing the SO series. All component parts are easily accessible which facilitates prompt and hassle free maintenance. The use of high quality materials and the reduced number of wear parts make the BOGE oil-free screw compressors as efficient and reliable as any demanding customer would expect. The entire production process is subject to permanent quality assurance and is closely monitored by an experienced quality team – from receiving inspection of purchased parts to final inspection and testing.



FREQUENCY CONTROL (OPTIONAL FEATURE)

The SO series is available with frequency control as an option. It is designed to optimise demand fluctuations enabling a particularly energy efficient operation. The frequency converter is supplied either separately or integrated into the switch cabinet. Part load regulation is then achieved by dynamic speed change. Frequency controlled screw compressors are intended for use as stand-alone machines or ideally suited when covering peak loads in multiple compressor systems with high oil-free compressed air demands – ideally in combination with BOGE turbo compressors.



PRIME COMPRESSOR CONTROL

The PRIME control is the latest state-of-the-art energy efficient controller to come from BOGE. A large-scale back-lit LC display with clear text information shows error/maintenance messages, operating status and all operating parameters on three main menus. Volume flow and pressure characteristics are graphically displayed and freely scalable. The modular design means optional displays – e.g. pressure dew point – can be easily added. The PRIME is fitted with an integral real-time clock and a switch clock function making it possible to control external equipment. Communication is effected via RS 485 interfaces or potential-free contacts.

Screw compressor **SO 61** to **SO 126**

(air and water cooled)

Screw compressor **SO 150** to **SO 480** (water cooled)



Free air delivery: 5.25 – 51.4 m³/min, 185 – 1815 cfm

Pressure range: 8 – 10 bar, 115 – 150 psig

Motor range: 45 – 355 kW, 60 – 480 HP



SO 126



SO 220



MOTOR

These models are equipped with a three-phase asynchronous motor, ISO class F with additional motor reserves to meet the most challenging operating conditions. The motor is installed in the cool air intake section of the package and is thermistor protected to ensure a long service life.



WATER COOLING

Where large volumes of air are required water-cooling is a must. The intelligent BOGE cooling concept guarantees safe and economical cooling of the compressor with optimum maintenance friendliness.



EXHAUST AIR COOLING

As an option the SO series can be equipped with a cowl cooler eliminating the need for expensive exhaust air ducts.



PRIME CONTROL

The PRIME control is the latest state-of-the-art energy efficient controller to come from BOGE. A large-scale back-lit LC display with clear text information shows error/maintenance messages, operating status and all operating parameters on three main menus.

Highly efficient oil-free compressed air: Engineered to produce oil-free compressed air at a level of efficiency and safety never seen before with **13 models and 31 variants** ensuring there is a version to meet all requirements. Water cooled and air cooled options are available.

| BOGE Model | Max. pressure | | Effective free air delivery* | | Motor power | | | | Dimensions silenced W x D x H mm | Dimensions super-silenced W x D x H mm | Weight silenced kg | Weight super-silenced kg |
|------------|---------------|------|------------------------------|------|------------------|-----|-----------|------|--|--|-----------------------|-----------------------------|
| | bar | psig | m ³ /min | cfm | Main drive motor | | Fan motor | | | | | |
| | | | | | kW | HP | kW | HP | | | | |
| SO 61 A | 8 | 115 | 6.65 | 235 | 45 | 60 | 4.80 | 6.50 | 2545x1295x1888 | 3766x1295x2385 | 2598 | 2877 |
| | 10 | 150 | 5.25 | 185 | 45 | 60 | 4.80 | 6.50 | 2545x1295x1888 | 3766x1295x2385 | 2598 | 2877 |
| SO 76 A | 8 | 115 | 8.60 | 313 | 55 | 75 | 4.80 | 6.50 | 2545x1295x1888 | 3766x1295x2385 | 2634 | 2913 |
| | 10 | 150 | 7.70 | 272 | 55 | 75 | 4.80 | 6.50 | 2545x1295x1888 | 3766x1295x2385 | 2634 | 2913 |
| SO 101 A | 8 | 115 | 12.06 | 426 | 75 | 100 | 4.80 | 6.50 | 2545x1295x1888 | 3766x1295x2385 | 2723 | 3002 |
| | 10 | 150 | 10.46 | 369 | 75 | 100 | 4.80 | 6.50 | 2545x1295x1888 | 3766x1295x2385 | 2723 | 3002 |
| SO 126 A | 8 | 115 | 13.01 | 459 | 90 | 125 | 4.80 | 6.50 | 2545x1295x1955 | 3766x1295x2453 | 2763 | 3042 |
| | 10 | 150 | 13.01 | 459 | 90 | 125 | 4.80 | 6.50 | 2545x1295x1955 | 3766x1295x2453 | 2763 | 3042 |
| SO 61 W | 8 | 115 | 6.65 | 235 | 45 | 60 | 0.55 | 0.75 | 2666x1310x1846 | 3072x1310x1846 | 2150 | 2183 |
| | 10 | 150 | 5.25 | 185 | 45 | 60 | 0.55 | 0.75 | 2666x1310x1846 | 3072x1310x1846 | 2150 | 2183 |
| SO 76 W | 8 | 115 | 8.60 | 313 | 55 | 75 | 0.55 | 0.75 | 2666x1310x1846 | 3072x1310x1846 | 2320 | 2353 |
| | 10 | 150 | 7.70 | 272 | 55 | 75 | 0.55 | 0.75 | 2666x1310x1846 | 3072x1310x1846 | 2320 | 2353 |
| SO 101 W | 8 | 115 | 12.06 | 426 | 75 | 100 | 0.55 | 0.75 | 2666x1310x1846 | 3072x1310x1846 | 2490 | 2522 |
| | 10 | 150 | 10.46 | 369 | 75 | 100 | 0.55 | 0.75 | 2666x1310x1846 | 3072x1310x1846 | 2490 | 2522 |
| SO 126 W | 8 | 115 | 13.01 | 459 | 90 | 125 | 0.55 | 0.75 | 2666x1310x1846 | 3072x1310x1846 | 2540 | 2573 |
| | 10 | 150 | 13.01 | 459 | 90 | 125 | 0.55 | 0.75 | 2666x1310x1846 | 3072x1310x1846 | 2540 | 2573 |
| SO 150 | 8 | 115 | 18.60 | 646 | 110 | 150 | 0.75 | 1.00 | – | 3110x1500x1685 | – | 3400 |
| | 10 | 150 | 16.00 | 565 | 110 | 150 | 0.75 | 1.00 | – | 3110x1500x1685 | – | 3400 |
| SO 180 | 8 | 115 | 21.40 | 756 | 132 | 180 | 0.75 | 1.00 | – | 3110x1500x1685 | – | 3500 |
| | 10 | 150 | 19.40 | 685 | 132 | 180 | 0.75 | 1.00 | – | 3110x1500x1685 | – | 3500 |
| SO 220 | 8 | 115 | 26.00 | 918 | 160 | 220 | 0.75 | 1.00 | – | 3110x1500x1685 | – | 3500 |
| | 10 | 150 | 23.00 | 812 | 160 | 220 | 0.75 | 1.00 | – | 3110x1500x1685 | – | 3500 |
| SO 269 | 10 | 150 | 26.00 | 918 | 200 | 270 | 0.75 | 1.00 | – | 3110x1500x1685 | – | 3800 |
| SO 270 | 8 | 115 | 34.90 | 1232 | 200 | 270 | 1.10 | 1.50 | – | 3650x1800x2150 | – | 5600 |
| | 10 | 150 | 28.40 | 1002 | 200 | 270 | 1.10 | 1.50 | – | 3650x1800x2150 | – | 5600 |
| SO 340 | 8 | 115 | 42.30 | 1494 | 250 | 340 | 1.10 | 1.50 | – | 3650x1800x2150 | – | 5800 |
| | 10 | 150 | 35.90 | 1268 | 250 | 340 | 1.10 | 1.50 | – | 3650x1800x2150 | – | 5800 |
| SO 430 | 8 | 115 | 47.20 | 1667 | 315 | 430 | 1.10 | 1.50 | – | 3650x1800x2150 | – | 6000 |
| | 10 | 150 | 46.80 | 1653 | 315 | 430 | 1.10 | 1.50 | – | 3650x1800x2150 | – | 6000 |
| SO 431 | 8 | 115 | 51.40 | 1815 | 315 | 430 | 1.10 | 1.50 | – | 3650x1800x2150 | – | 6000 |
| SO 480 | 10 | 150 | 51.40 | 1815 | 355 | 480 | 1.10 | 1.50 | – | 3650x1800x2150 | – | 6600 |

* Free air delivery for the complete package in accordance with ISO 1217, Appendix C, at 20°C ambient temperature and maximum pressure. Emitted sound level as per PN8NTC2.3 from 76 dB(A)
The technical data is designed for international use: maximum ambient temperature + 40°C, maximum cooling water temperature + 40°C.
Different demands on request. Dimensions and construction are subject to change.

Screw compressor **SO 100** to **SO 200** (air and water cooled)



Free air delivery: 9.9 – 22.4 m³/min, 350 – 791 cfm
 Pressure range: 8 – 10 bar, 115 – 150 psig
 Motor range: 75 – 145 kW, 100 – 197 HP



SO 125 W



SO 181 A



GM DRIVE SYSTEM

The patented BOGE GM drive system allows optimal constant belt tension in any operating phase, including start-up. The V-belt never needs to be re-tensioned. This optimised system ensures high delivery outputs.



COOLING OPTIONS

Both air and water cooled versions are available. The maintenance friendly water-cooled version provides safe and efficient cooling of the compressor.



FREQUENCY CONTROLLED FAN MOTORS

Air-cooled compressors are equipped with a patented frequency controlled fan, for both the intermediate and after cooler, as standard. Cooling air is then specifically adapted – for optimised energy consumption.



PRIME CONTROL

The PRIME control is the latest state-of-the-art energy efficient controller to come from BOGE. A large-scale back-lit LC display with clear text information shows error/maintenance messages, operating status and all operating parameters on three main menus.

Dependable generation of oil-free compressed air: These efficient screw compressors generate safe, reliable, and dependable oil-free compressed air. With five models and 20 variants there is a version to meet every need. Supreme performance and maximum efficiency are further benefits realised thanks to the inclusion of BOGE's patented technologies such as the GM drive system to the frequency controlled fan motors.

| BOGE Model | Max. pressure | | Effective free air delivery* | | Motor power | | | | Dimensions super-silenced W x D x H mm | Weight super-silenced kg |
|------------|---------------|------|------------------------------|-----|------------------|-----|-----------|----|--|--------------------------|
| | bar | psig | m ³ /min | cfm | Main drive motor | | Fan motor | | | |
| | | | | | kW | HP | kW | HP | | |
| SO 100 A | 8 | 115 | 11.6 | 410 | 75 | 100 | 6.00 | 8 | 3100 x 1670 x 2550 | 3400 |
| | 10 | 150 | 9.9 | 350 | 75 | 100 | 6.00 | 8 | | |
| SO 125 A | 8 | 115 | 14.2 | 501 | 90 | 125 | 6.00 | 8 | 3100 x 1670 x 2550 | 3450 |
| | 10 | 150 | 12.1 | 427 | 90 | 125 | 6.00 | 8 | | |
| SO 151 A | 8 | 115 | 18.6 | 657 | 110 | 150 | 6.00 | 8 | 3100 x 1670 x 2550 | 3700 |
| | 10 | 150 | 16.2 | 572 | 110 | 150 | 6.00 | 8 | | |
| SO 181 A | 8 | 115 | 21.0 | 742 | 132 | 180 | 6.00 | 8 | 3100 x 1670 x 2550 | 3800 |
| | 10 | 150 | 19.5 | 689 | 132 | 180 | 6.00 | 8 | | |
| SO 200 A | 8 | 115 | 22.4 | 791 | 145 | 197 | 6.00 | 8 | 3100 x 1670 x 2550 | 3800 |
| | 10 | 150 | 20.8 | 734 | 145 | 197 | 6.00 | 8 | | |
| SO 100 W | 8 | 115 | 11.6 | 410 | 75 | 100 | 0.75 | 1 | 2700 x 1670 x 2100 | 3100 |
| | 10 | 150 | 9.9 | 350 | 75 | 100 | 0.75 | 1 | | |
| SO 125 W | 8 | 115 | 14.2 | 501 | 90 | 125 | 0.75 | 1 | 2700 x 1670 x 2100 | 3150 |
| | 10 | 150 | 12.1 | 427 | 90 | 125 | 0.75 | 1 | | |
| SO 151 W | 8 | 115 | 18.6 | 657 | 110 | 150 | 0.75 | 1 | 2700 x 1670 x 2100 | 3500 |
| | 10 | 150 | 16.2 | 572 | 110 | 150 | 0.75 | 1 | | |
| SO 181 W | 8 | 115 | 21.0 | 742 | 132 | 180 | 0.75 | 1 | 2700 x 1670 x 2100 | 3600 |
| | 10 | 150 | 19.5 | 689 | 132 | 180 | 0.75 | 1 | | |
| SO 200 W | 8 | 115 | 22.4 | 791 | 145 | 197 | 0.75 | 1 | 2700 x 1670 x 2100 | 3600 |
| | 10 | 150 | 20.8 | 734 | 145 | 197 | 0.75 | 1 | | |

* Free air delivery for the complete package in accordance with ISO 1217, Appendix C, at 20°C ambient temperature and maximum pressure. Emitted sound level as per PN8NTC2.3 from 78 dB(A)
 The technical data is designed for international use: maximum ambient temperature + 40°C, maximum cooling water temperature + 40°C.
 Different demands on request. Dimensions and construction are subject to change.


W = water cooled A = air cooled

There are many ways to dry compressed air. The most reliable and efficient ones come from us!

FOUR OPTIONS, COUNTLESS ADVANTAGES

BOGE offers four systems for drying oil-free compressed air. After thorough analysis of your compressed air requirements and quality targets

our experts will be able to recommend the optimal solution to meet your needs whilst achieving the ideal cost-benefit ratio.

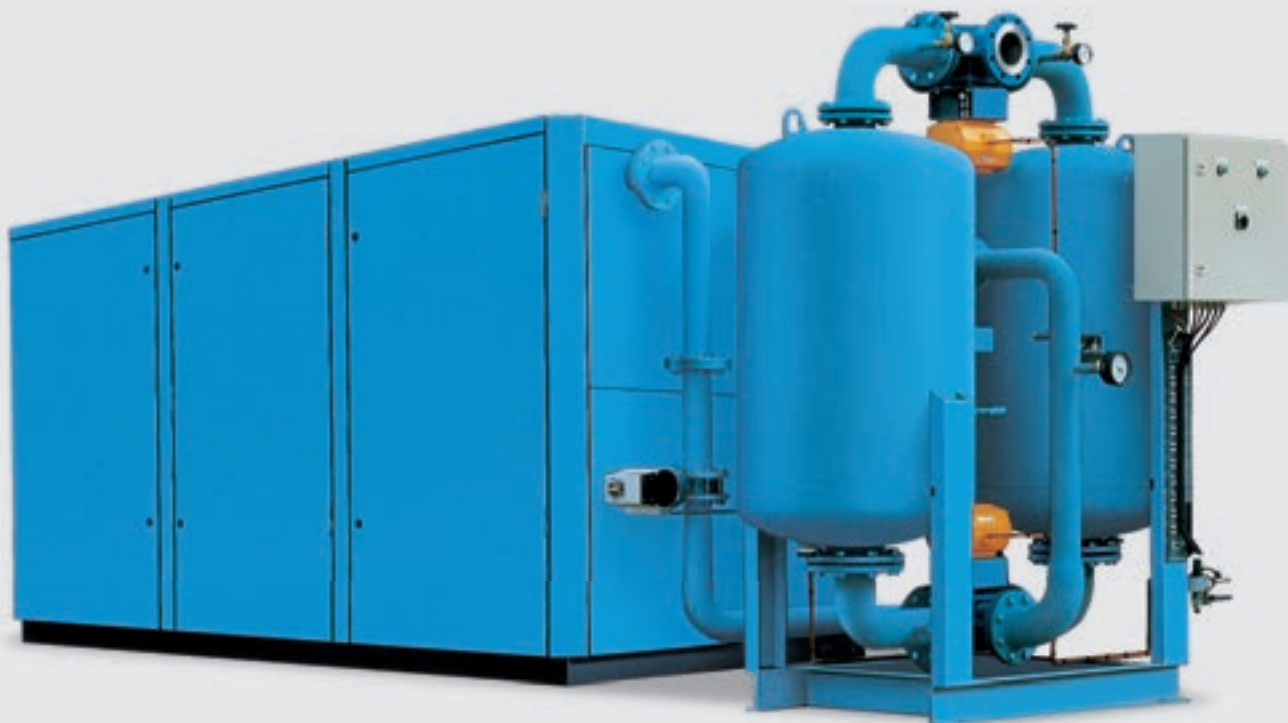

OPTIMISE THE ENERGY FROM THE COMPRESSED AIR DRYER

All BOGE SO series compressors can be supplied with a Heat Of Compression (HOC) adsorption dryer to reach pressure dew points up to -40°C . The heat recovered, via the intercoolers, provides all the necessary regeneration in a loss free cycle minimising the requirement of auxiliary power.

Tell us your requirements, we provide the know-how: The selection of a dryer depends on the required point of use compressed air quality. BOGE experts will ensure the most effective and most efficient dryer solution customised to meet your needs.



REFRIGERANT COMPRESSED AIR DRYER

The pressure dew point of the refrigerant compressed air dryer is +3°C (DIN ISO 7183). Providing that the system temperature never falls below +3°C and air quality meets the production requirement, then a refrigerant dryer is the ideal choice for compressed air purification.



HEATLESS ADSORPTION DRYER

Heatless adsorption dryers for pressure dew points to – 70°C are necessary when a higher compressed air quality is required. For the regeneration process heatless adsorption dryers require purge air which must be included when sizing the compressor.



HEAT-REGENERATED ADSORPTION DRYERS

Heat regenerated adsorption dryers with pressure dew points up to -70°C are more economical at higher flow capacities than the heatless type. Regeneration heat is supplied using ambient air heated by an external electrical heater and drawn in as vacuum regeneration.

READY FOR ACTION WORLDWIDE:

BOGE Service Support – Worldwide



SERVICE

Service / Maintenance

Service support solutions including contracts covering repair and even warranty extension. Routine maintenance according to our flat rate service plan as well as inspection and breakdown cover.

Extended Warranty

Extension of your factory warranty up to 5 years with the BOGE cairplan: for total security and back-up (see overleaf for more details).

Comprehensive Service Cover

The comprehensive “cair” package includes a guaranteed reaction time within the warranty period.

Maintenance & Repair

Options include; long-term fixed cost maintenance plans, a flat rate for all types of service and spare parts with a possible warranty extension up to 10 years.

Commissioning

Connection and adjustment of all equipment at your facility: a fast and dependable service delivered by qualified BOGE service technicians. Full installation on request.

24 Hour Helpline

Emergency helpline for trouble shooting and technical support: available any time around the clock!

COMPRESSED AIR FLAT RATE

A comprehensive service plan created to satisfy your individual requirements: e.g. taking responsibility for the compressed air station at your facility including complete plant management for a monthly flat rate irrespective of hours of operation (energy costs not included).

FLEXIBLE SERVICE

This BOGE service programme has been developed to adapt to each customer’s unique requirements. It is our objective to create a tailor-made BOGE service package covering inspection, service, breakdown, with customised warranty arrangements as well as complete all-in service contracts.

Service your added value! Maximised reliability and economic efficiency are not the only technical advantages that BOGE has to offer. Our comprehensive service support program will ensure your BOGE compressed air system remains in tip top condition. Wherever you need us, whatever we can do for you: BOGE Service Support is always readily available close by – competent, to the highest standards, and always one step ahead.



BOGE CAIRPLAN

BOGE **cairplan** enables you to extend your factory warranty up to 5 years: 2 years factory warranty with 3 years additional **cairplan** warranty – the choice is yours. Furthermore, **cairplan** ensures manufacturer's recommended maintenance schedule of new and existing equipment at the specified service intervals.

For more information email
cairplan@boge.com



BOGE ORIGINAL PARTS

Only original BOGE spare parts have the manufacturer's technological edge. You can be confident when opting for BOGE original spare parts in the service of your BOGE compressed air system will ensure that the integrity of the compressor is maintained, efficiency is retained and your peace of mind is sustained.



ALWAYS NEARBY

BOGE has a network of dedicated service technicians and certified partners at its disposal to help you worldwide with your installation, upgrading, commissioning or approval, maintenance, repair, or inspection: You can rely on the know-how and experience of our qualified experts – at all times.

Hotline Mobile Service: +49 5206 601-130



EMERGENCY ASSISTANCE

In the case of an emergency where immediate technical support is required, the BOGE product support trouble shooters or the BOGE Helpline team are available to you 24/7.

Product Support Hotline:
+49 5206 601-140

BOGE Helpline: +49 170 4400444



AIR AUDITS

By analysing your existing compressed air system, our energy efficiency experts can identify where savings can be made. The BOGE AIRreport includes measurement of: dew point control, vibration control, leakage, noise, oil check and TAN check.



TRAINING COURSES

The BOGE Compressed Air College was established in order to train and certify internal employees and external partners as qualified BOGE Service Technicians. Attendance of training courses held in the in-house training centre further assist in refreshing existing BOGE Service Technician's knowledge at regular intervals.

For four generations, customers from mechanical engineering, industry and trade have relied on BOGE know-how when it comes to planning, developing and manufacturing compressed air systems. They are fully aware of the fact that BOGE AIR is more than just ordinary compressed air: utmost safety, outstanding efficiency, excellent quality, maximised flexibility along with dependable service are the ingredients to transform BOGE AIR into air to work with – in Germany, in Europe and in more than 80 countries around the world.

Our ranges of services include the following:

- Energy efficient systems development
- Plant design and engineering
- System control and visualisation
- Oil-free piston, screw and turbo compressors
- Oil injected screw compressors
and oil lubricated piston compressors
- Compressed air treatment
- Compressed air distribution and storage
- Compressed air accessories
- Compressed air service

